



Single-mode Fiber Laser

YLLS-3000-W

Adopting new appearance design, new optical structure design, with higher beam quality, high stability of laser output, higher integration, more optimized structure, one-piece fully closed design, space-saving, more user-friendly use and maintenance.

Advantages

- 19-inch 2U rack design cabinet, easier integration
- IoT integration technology, remote service
- 976nm Pumping technology, EO conversion efficiency > 40%

Applications

Can be used in stainless steel, carbon steel, aluminum, copper, and other metal materials cutting, welding, drilling, sheet metal cutting, hardware processing, home appliance manufacturing, 3C and other fields widely used.

GW's economical laser series is oriented to the user group with the ultimate cost performance requirement, taking economy as the core, taking into account high quality and low price, which can fully meet the daily production and use needs of customers.

- New optical structure design with higher beam quality
- High laser output stability, higher integration, more optimized structure
- ABR anti-reflection design, suitable for a variety of high reflective materials processing applications
- The output core diameter can be customized to meet multiple application requirements



EO conversion
efficiency ≥ 40%



Easily process
high anti materials



High integration




Remote IoT access

Single-mode Fiber Laser

YLLS-3000-W

Product specification parameter	YLLS-3000-W
Output Power (watt)	3000
Operating Mode	CW/Pulse
Output Power Range (%)	1-100
Output Laser Wavelength (nm)	1080±10
Beam Quality	$M^2 \leq 6.5$
Interface Type	QBH
Delivery Fiber Core Diameter (conventional configuration, optional)	50um
Cooling Method	Water-cooling
Ambient Temperature Range (°C)	10-40
Input Voltage	380VAC/50Hz
Dimension (mm)	648 x 483 x 89 (L×W×H)
Weight (kg)	≤35

Unit: mm

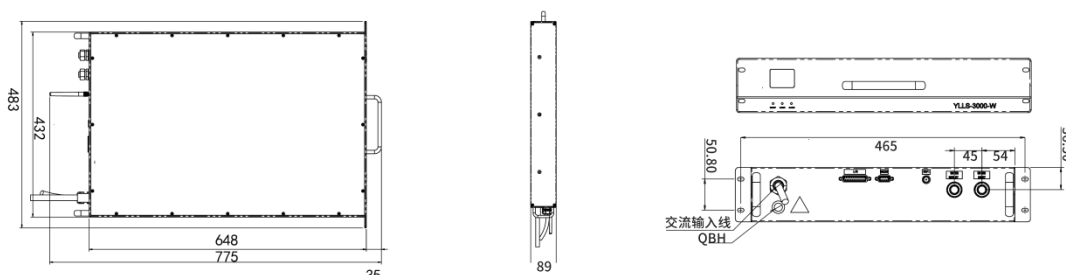

Legal Notice: All product information is believed to be accurate and subject to change without notice.

Legal statement:

GW smart fiber laser products are designed in strict accordance with safety regulations. All production is in accordance with international standards and regulations currently in force in the country. Each GW laser has a warning sign as shown in the figure.

MAX. AVERAGE OUTPUT POWER: 12 kW
MAX. PEAK OUTPUT POWER: 20 kW
PULSE DURATION: 0.2-2 ms
PULSE REPETITION RATE: 50 Hz-10 kHz
WAVELENGTH RANGE: 900-1200 nm

DANGER - INVISIBLE LASER
RADIATION AVOID EYE OR SKIN
EXPOSURE TO DIRECT OR
SCATTERED RADIATION
CLASS 4 LASER PRODUCT

IEC 60825-1:2014



GW(Shanghai) Laser Technology Co.,Ltd. Tel: +86 2139721122 Email: sales@gwaser.tech

Web: www.gwaser.tech

Addr: Building 5-1, No.398, Shuanglian Road, Xujing Town, Qingpu District, Shanghai